


T-Pump

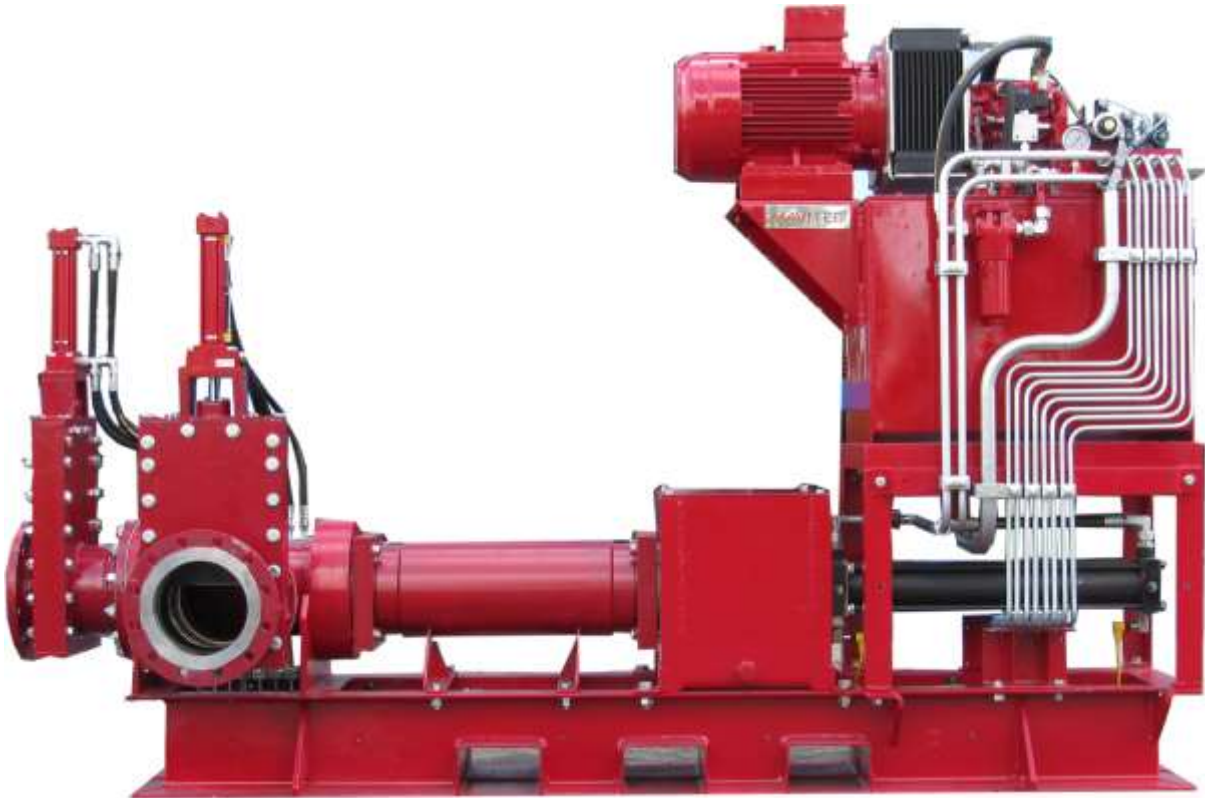

Function: designed for viscous material like crushed shop return material, sludges, raw materials etc.

Features:

- Hydraulically operated
- Heavy duty execution
- Simple and low maintenance design
- Compact size
- Low installed kW compared to capacity
- Unique water box system prevents product contamination


Capacity*: (* depends on material composition)

8" x 24 → up to 10 tons per hour

12" x 24 → up to 20 tons per hour



T-Pump

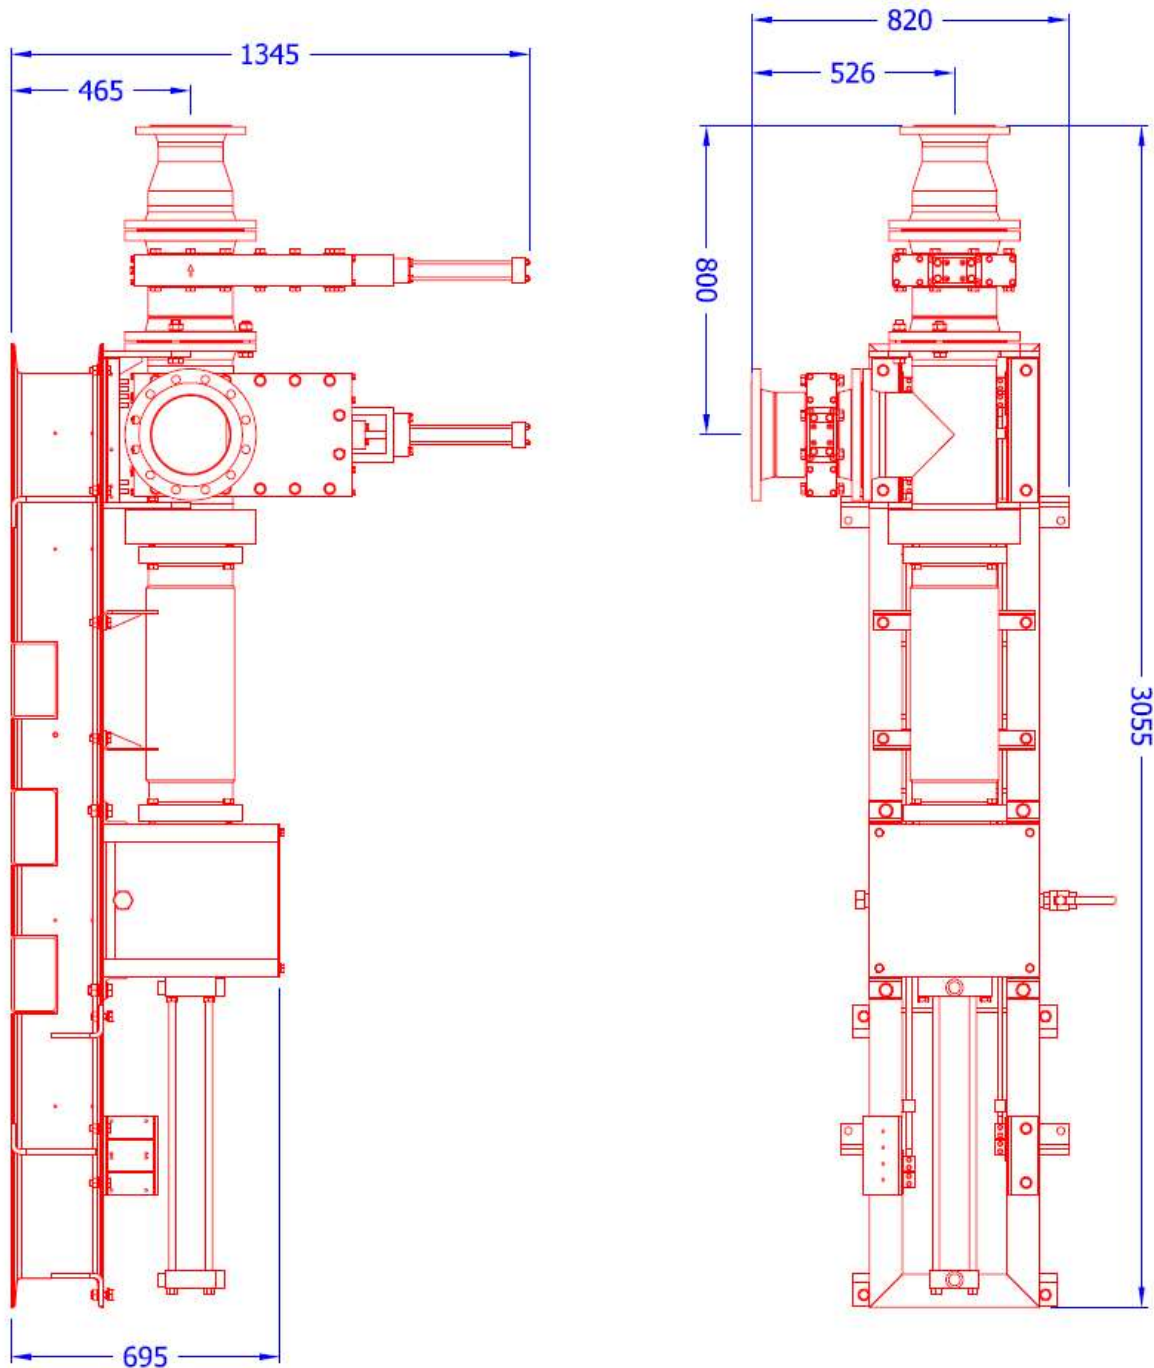

Due to ongoing product improvements, data shown here is subject to change without notice.
Contact Mavitec B.V. for latest specifications.



Galileistraat 32, 1704 SE Heerhugowaard, The Netherlands
Tel.: +31-72-574 59 88 - Fax: +31-72-574 55 48
E-mail: info@mavitec.com - www.mavitecgreenenergy.com