

Paddle Depacker



The Paddle Depacker is designed to separate the packaging from the organic material. It produces a clean organic output that is extremely suitable for biogas installations. With its simple and low maintenance design the Paddle Depacker distinguishes itself from other systems.

Features:

- Heavy duty execution
- Simple and low maintenance design
- Compact size with high capacity
- Variable screen sizes available
- > 99,7%* clean organic output
- Quick opening doors for easy cleaning
- Hydraulic opening covers
- Bolt free screen exchange
- Low installed power
- Fixed shaft execution
- Stainless steel isolated splash shields for low noise operation

**depending on material composition*


Capacity:

- Up to 30m³/hr per machine



Easy screen exchange

Paddle Depacker

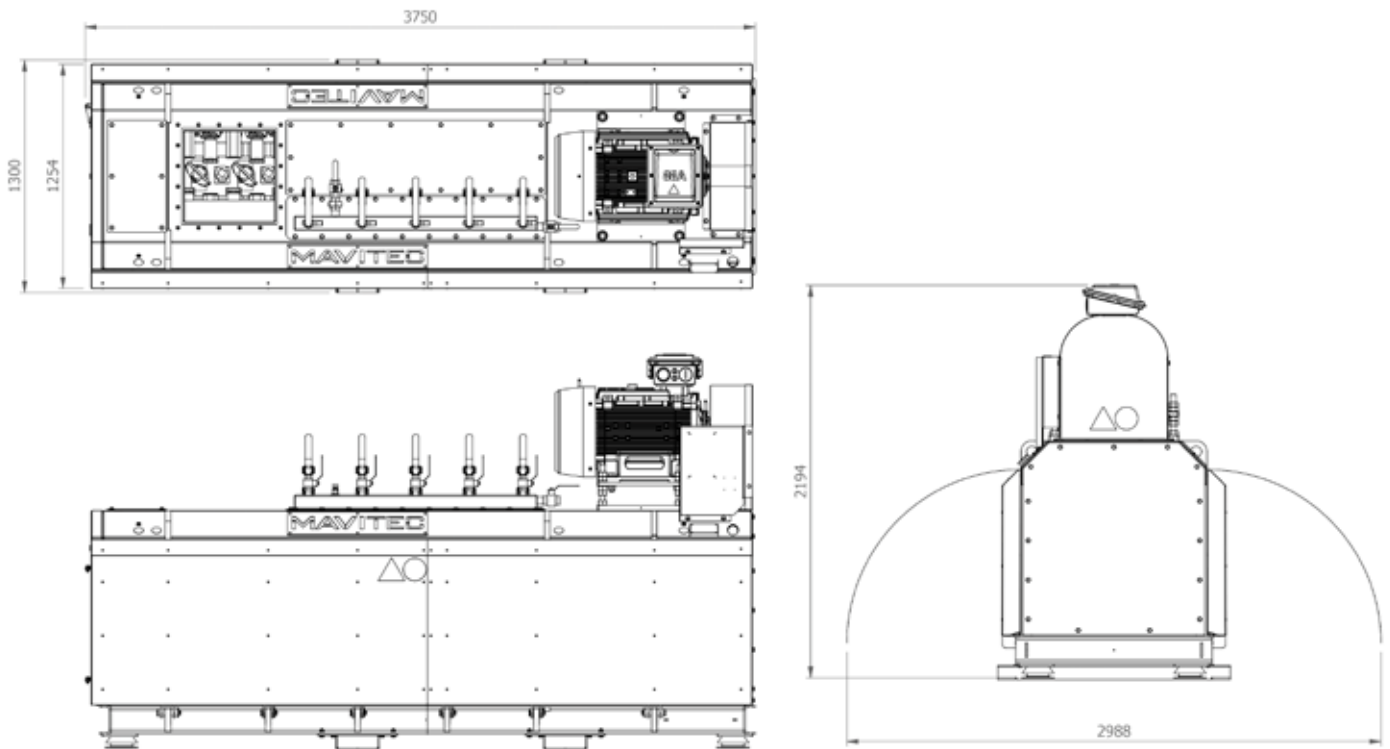

Paddle Depacker†

PD	Capacity	Power	Weight	Length (A)	Width (B)	Height (C)
model	m ³ /hr	kW	kg	mm	mm	mm
PD740	30	55	5500	4215	3000	2200

Please note that the data presented here is subject to change without notice due to ongoing product improvements.
For the most up-to-date specifications, we recommend contacting Mavitec B.V. directly.



Maximize the value of your by-products!

Galileistraat 32 - 1704 SE Heerhugowaard - The Netherlands

Tel.: +31 (0)72 574 59 88 | E-mail: info@mavitec.com

www.mavitec.com